





How to change: Peugeot 208 1 pollen filter – replacement guide

 VIDEO TUTORIAL

Important!

This replacement procedure can be used for:
PEUGEOT 2008 I (CU_) 1.2 VTi, PEUGEOT 208 I (CA_, CC_) 1.2 VTI 82

The steps may slightly vary depending on the car design.



REPLACEMENT: POLLEN FILTER – PEUGEOT 208 1. LIST OF THE TOOLS YOU'LL NEED:



- Flat Screwdriver
- Fender cover

Replacement: pollen filter – Peugeot 208 1. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Warning! Shut down the engine before starting any work – Peugeot 208 1.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1




Open the bonnet.

2



Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3

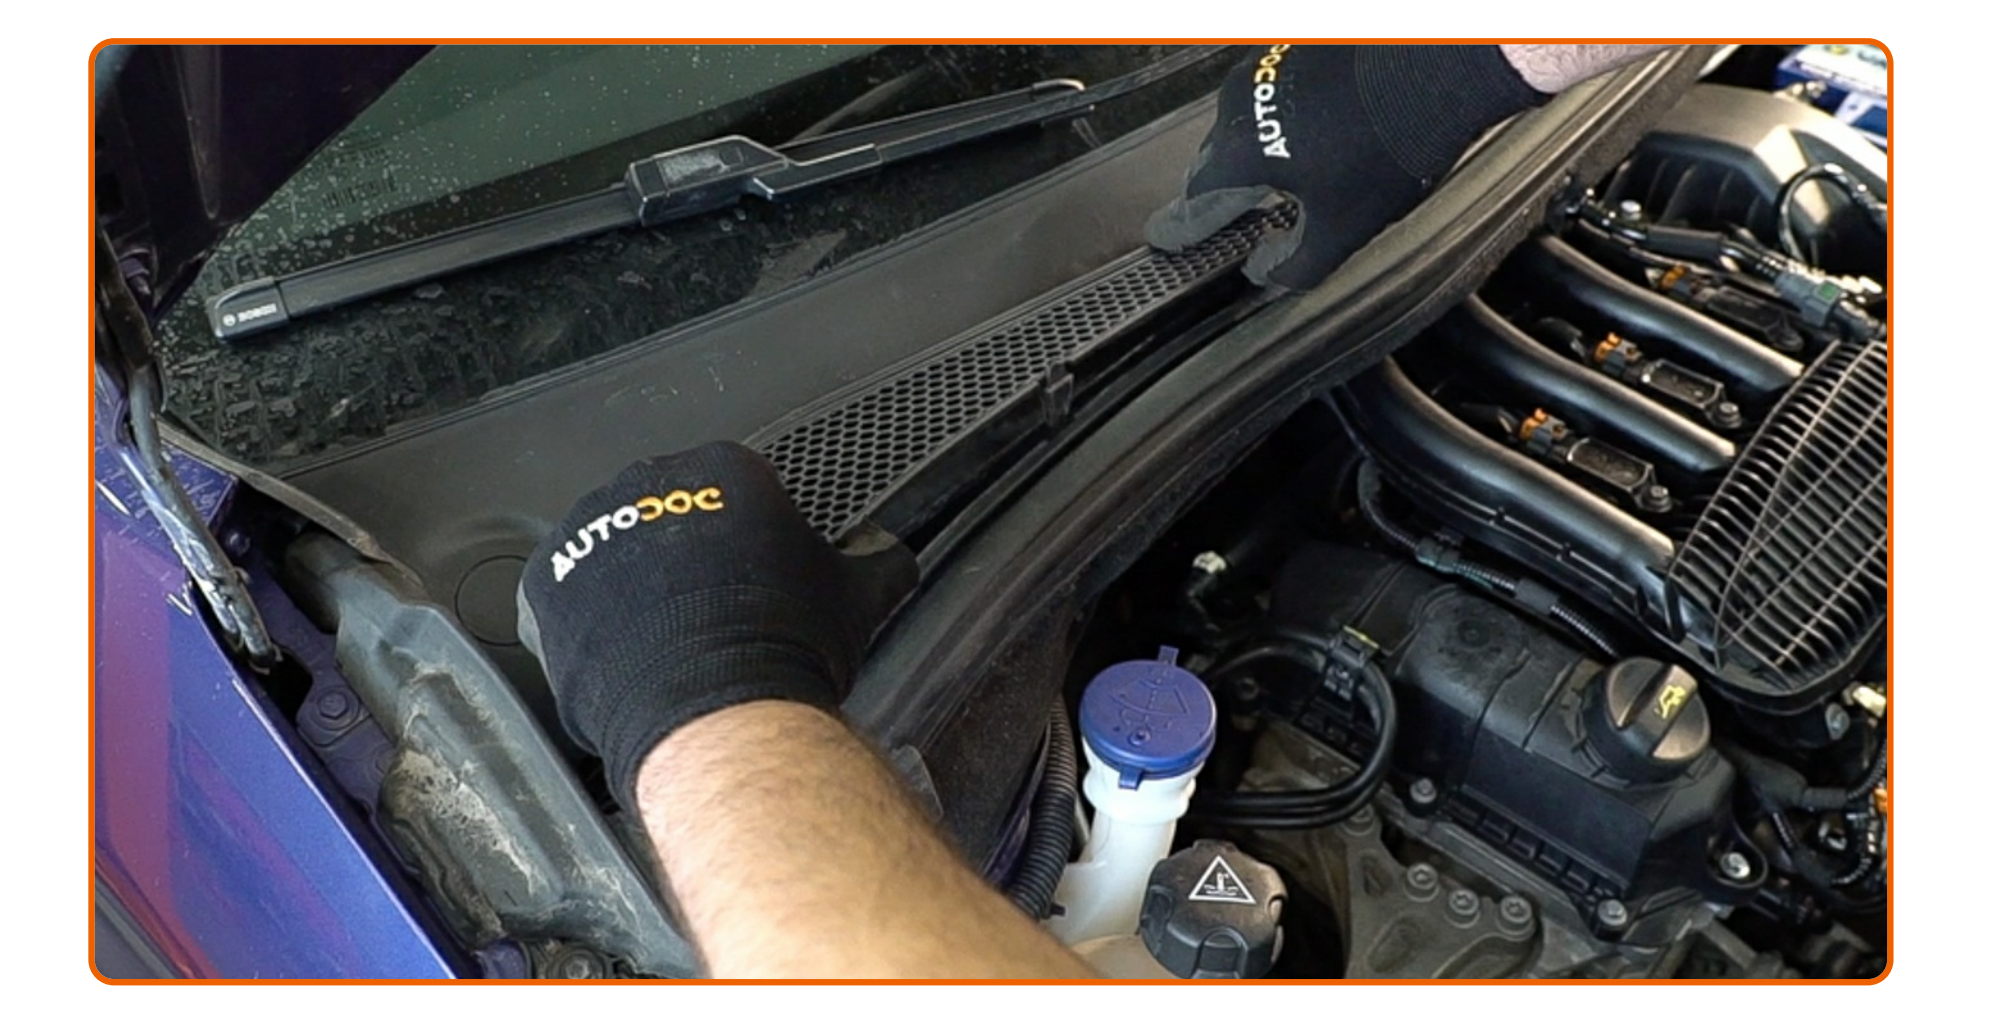

Pry up, carefully release from the fasteners and remove the side trim panel on the passenger side.

4



Release the cabin filter cover clips. Pull down the cabin filter housing cover. Use a flat screwdriver.

5




Take all filter cartridges out.

Replacement: pollen filter – Peugeot 208 1. Tip from AUTODOC:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

6.1

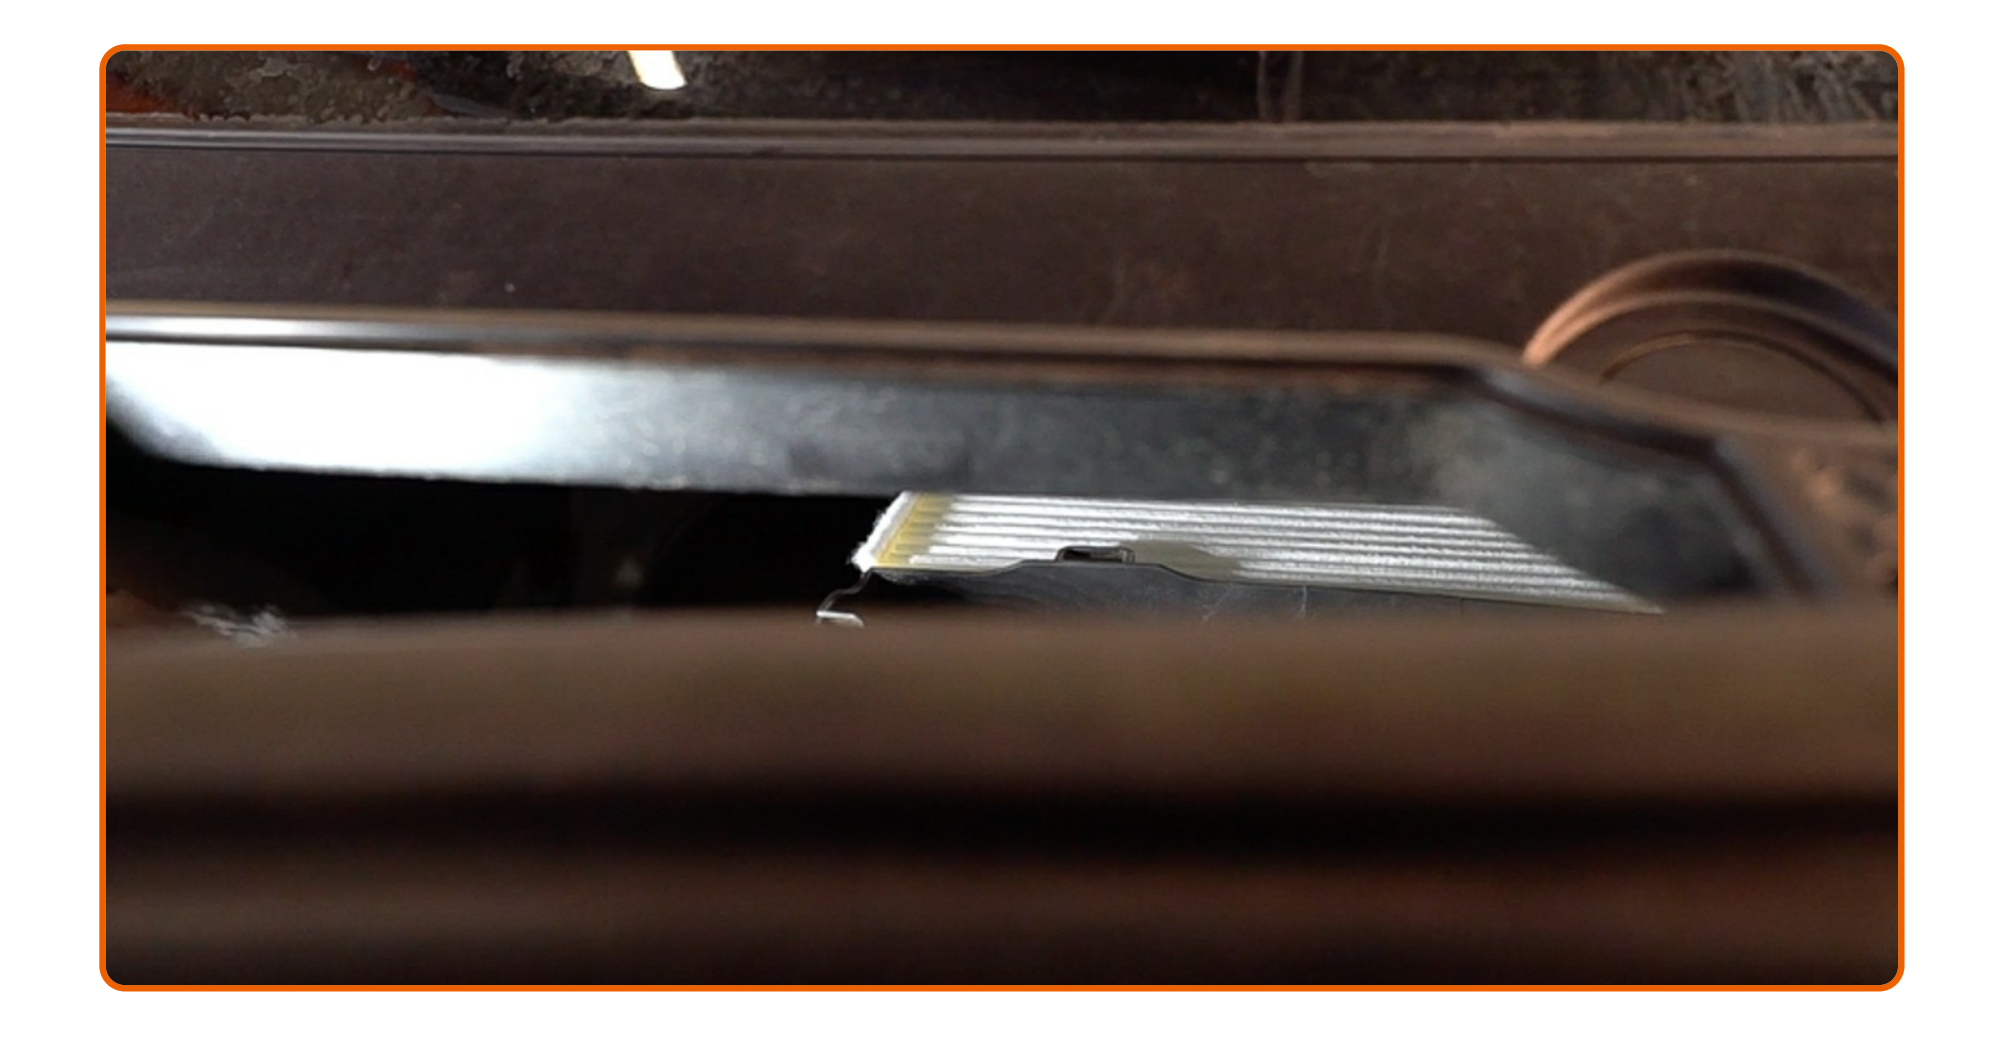

Install new filter cartridges.

6.2



Make sure that the filter edge fits tight to the housing.

AUTODOC recommends:

- Follow the air flow direction arrow on the filter.
- Replacement: pollen filter – Peugeot 208 1. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.

7



Reinstall the cabin filter housing cover.

8




Install the side trim panel. Position the part using the guides and lock the fasteners.



Replacement: pollen filter – Peugeot 208 1. Professionals recommend:

- Do not apply excessive force when installing the part. Otherwise you may damage the fasteners.

9

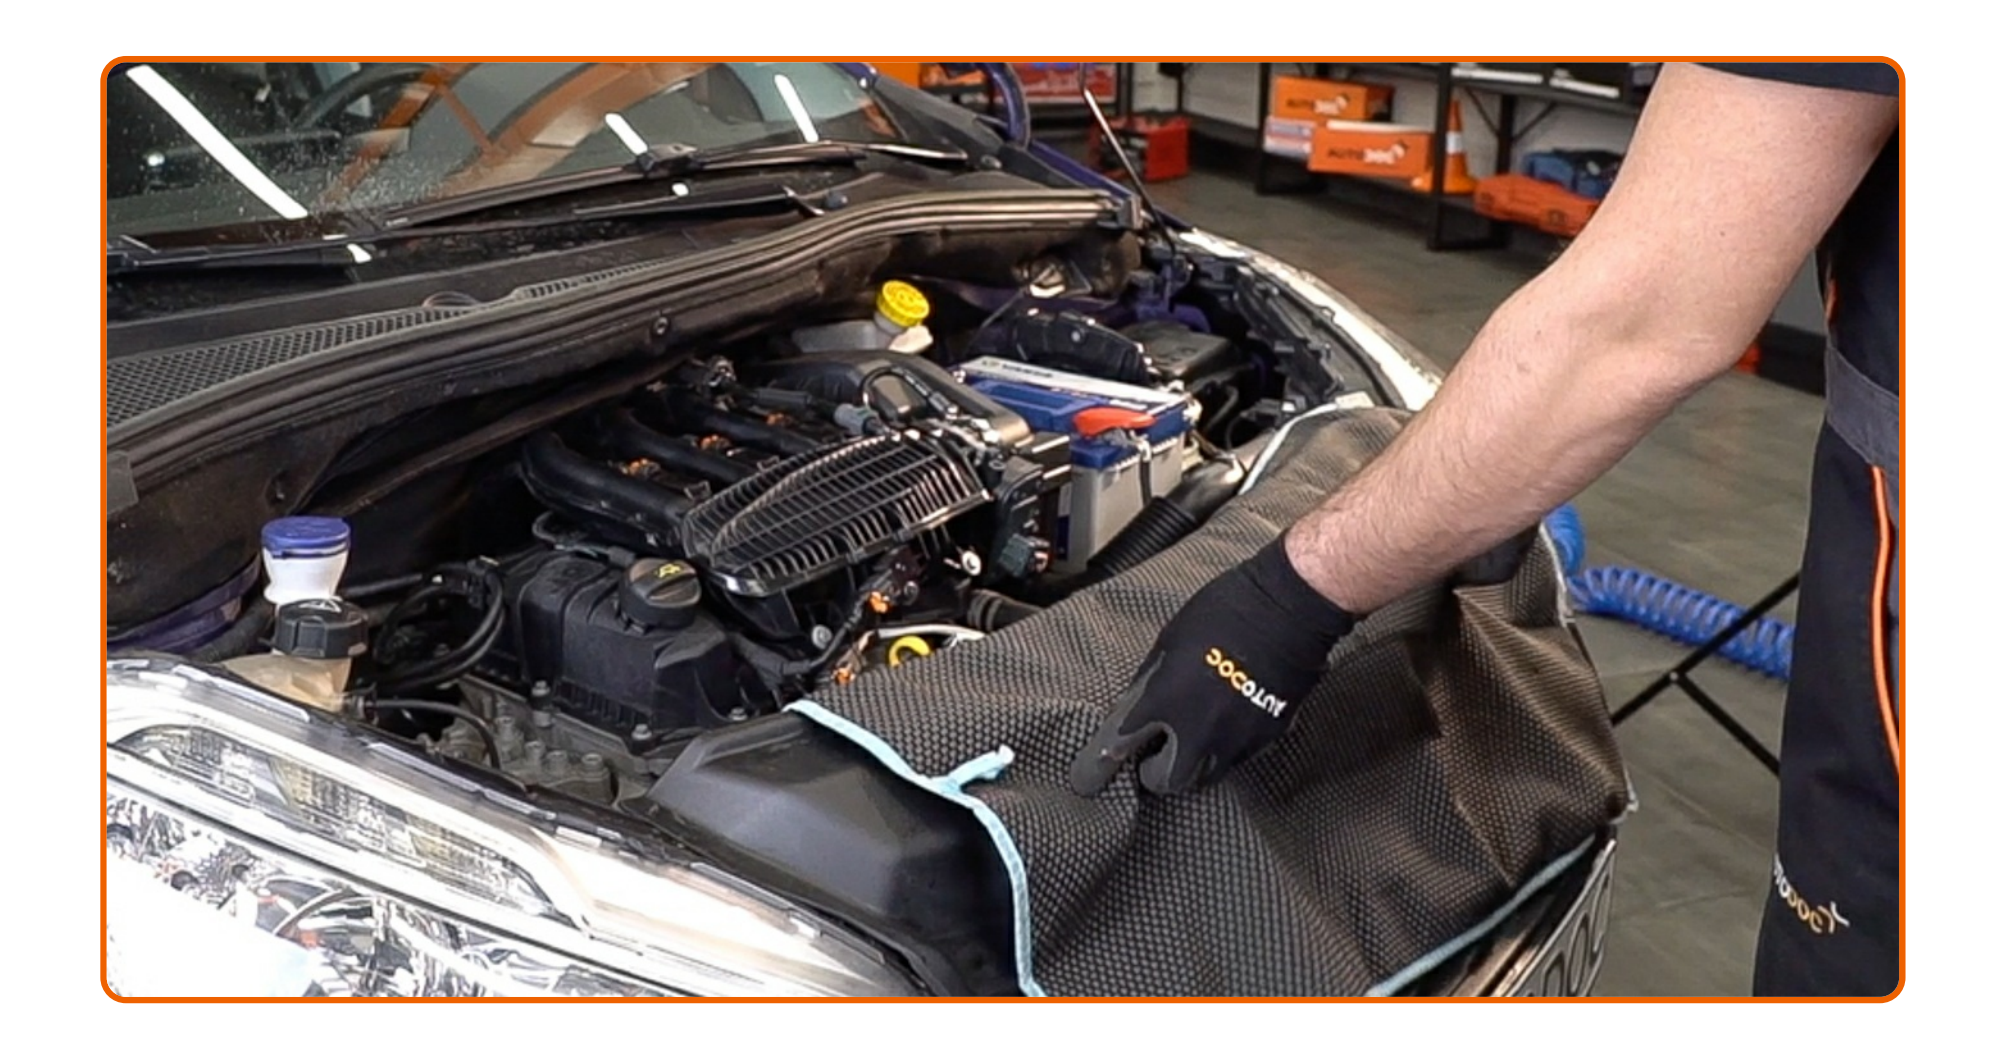

Remove the fender protection cover.

10



Close the hood.

11

Switch on the ignition.

12

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

13

Switch off the ignition.

DID YOU FIND THESE INSTRUCTIONS HELPFUL?

YES

NO



BECOME A MEMBER OF AUTODOC CLUB!

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING




A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR






BUY SPARE PARTS FOR PEUGEOT

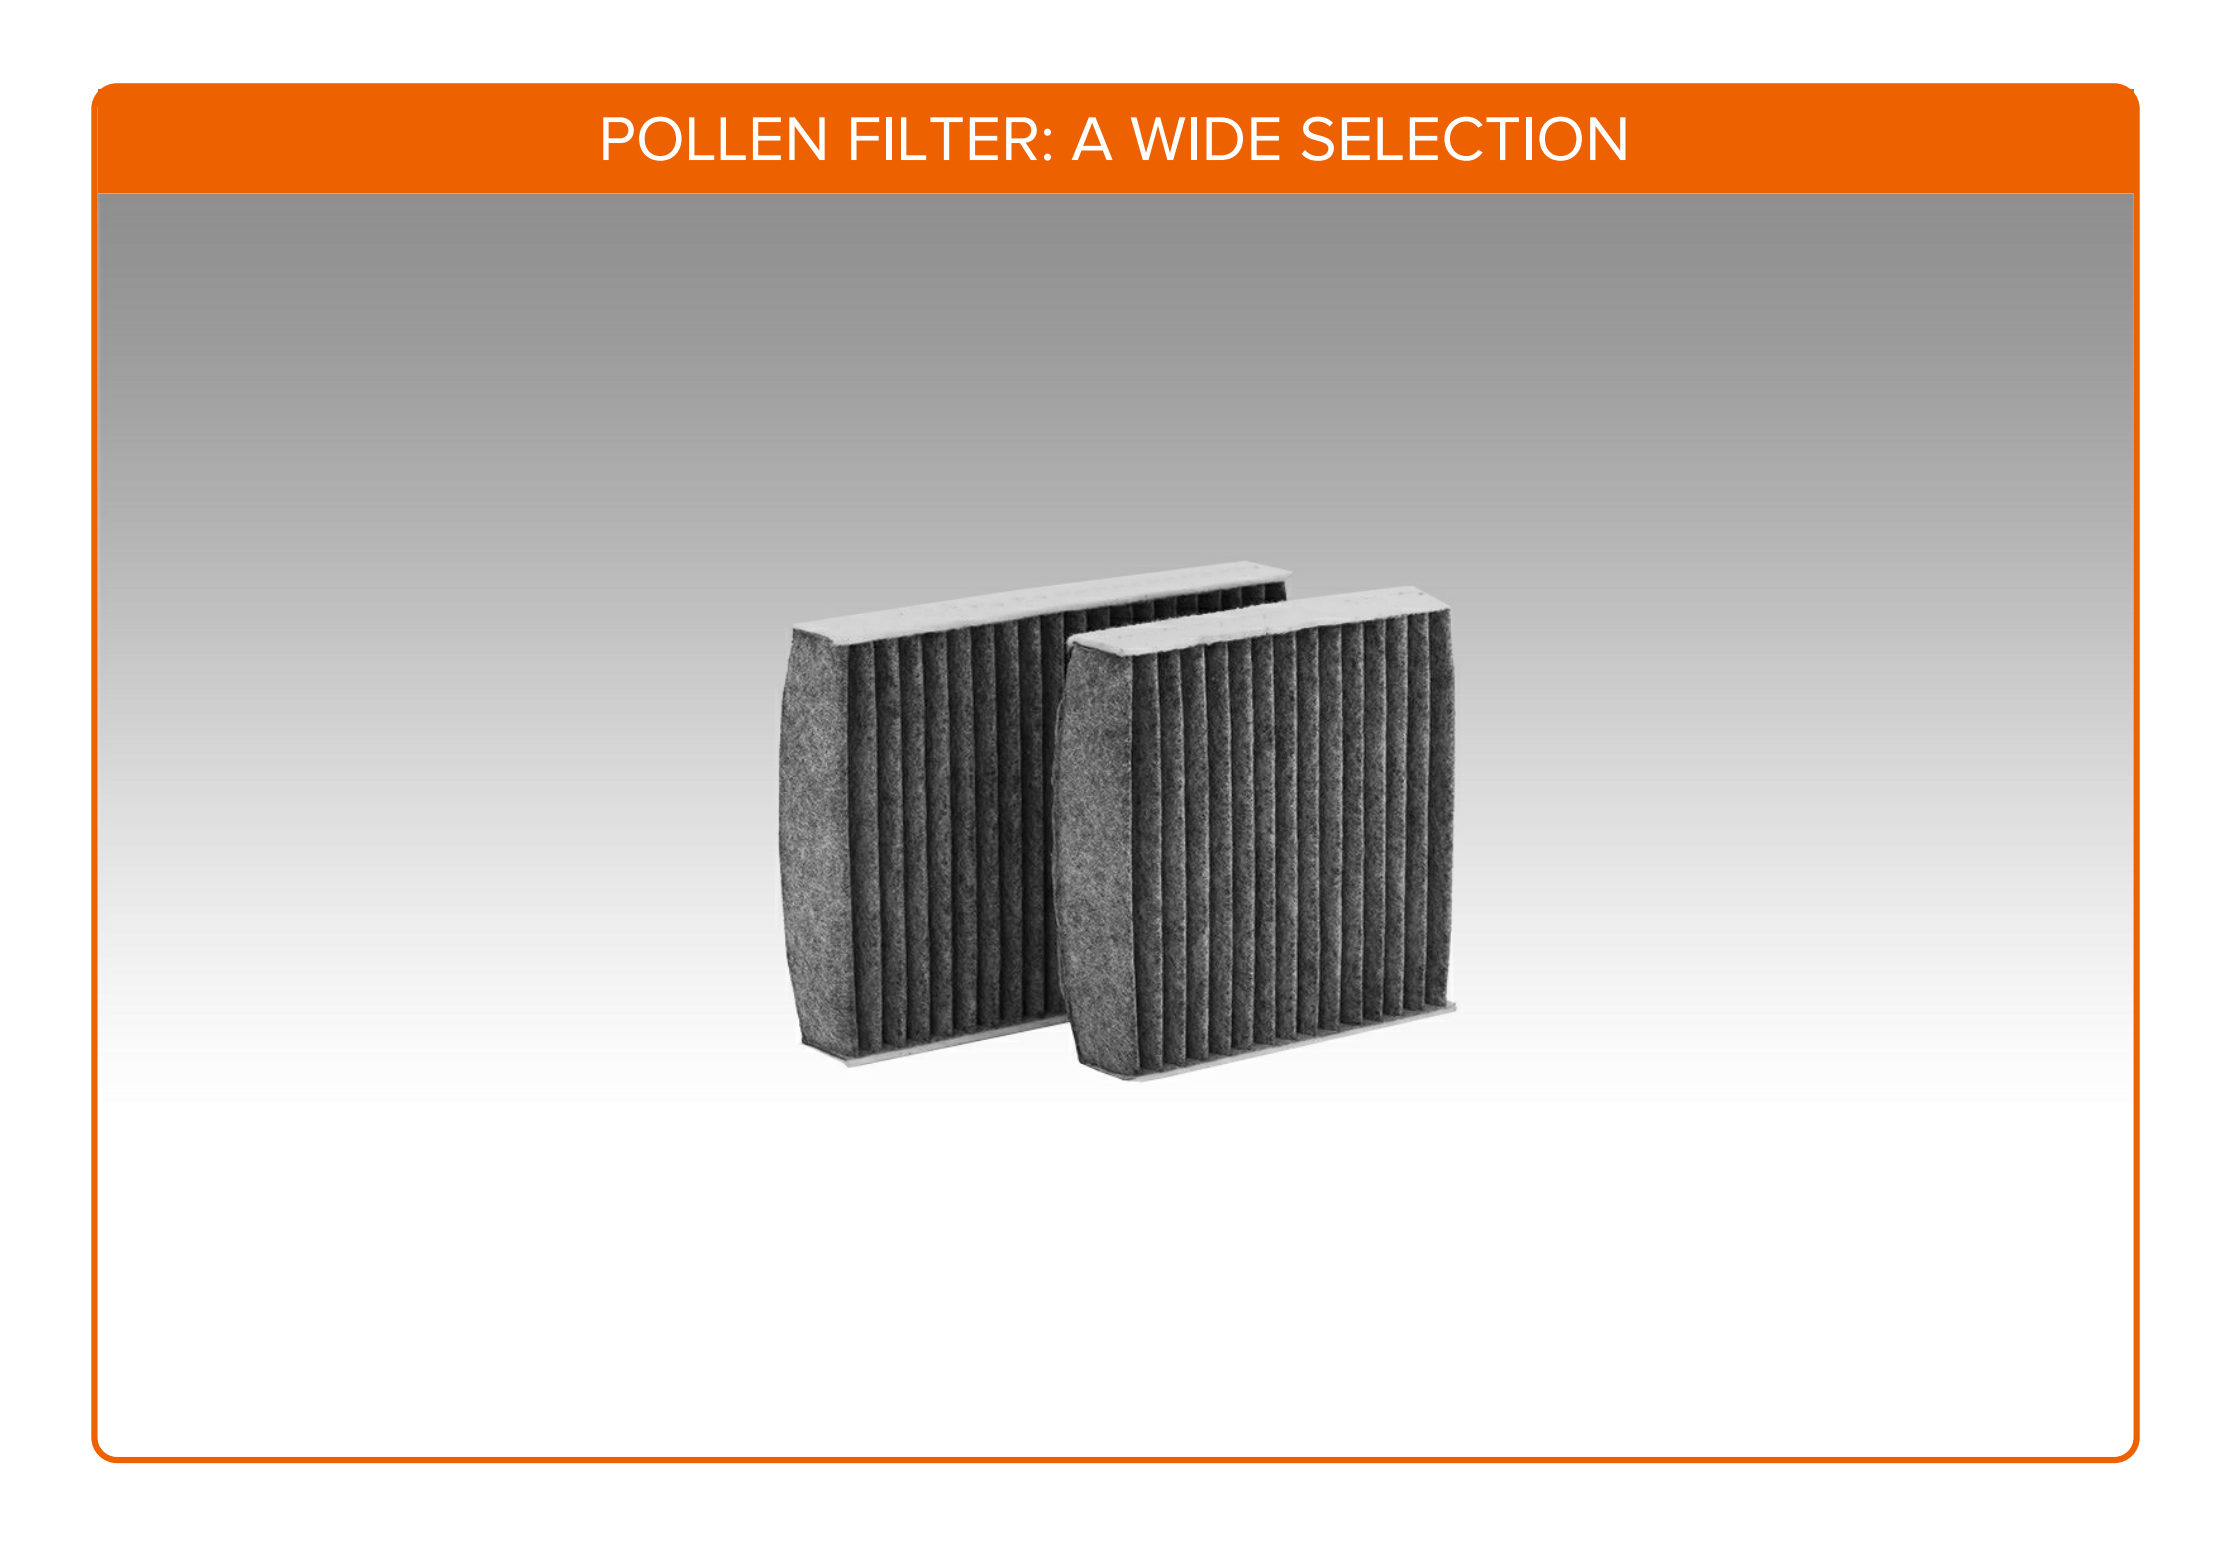
POLLEN FILTER: A WIDE SELECTION



CHOOSE CAR PARTS FOR PEUGEOT 208 1



POLLEN FILTER FOR PEUGEOT: BUY NOW

POLLEN FILTER FOR PEUGEOT 208 1: THE BEST DEALS & OFFERS



ⓘ Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AutoDoc shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.